# **LUME 2.0** SERIES

Imported from Italy, our **LUME 2.0** Series is inspired by Moroccan Zellige tiles and features a solid range of organic colours with strong variation. Available in a 60x240mm brick format for wall only.

| | |
|---|---|
| **PRODUCT TYPE:** | Glazed porcelain wall tile |
| **COLOURS:** | Off-White, Rosa, China and Forest |
| **SIZES:** | 60x240mm<br>Non-Rectified Edges |

| | |
|---|---|
| **FINISHES/USAGE:** | Gloss/Wall only |
| **AESTHETIC QUALITIES:** | Organic colour range and glossy surface |
| **ORIGIN:** | Italy |
| **TECHNICAL DATA:** | More technical data on last page |

**VARIATION:**



V4

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# **LUME 2.0** SERIES

## **PRODUCT** INFORMATION

**Off-White**

Gloss 60x240mm

**Rosa**

Gloss 60x240mm

**China**

Gloss 60x240mm

**Forest**

Gloss 60x240mm

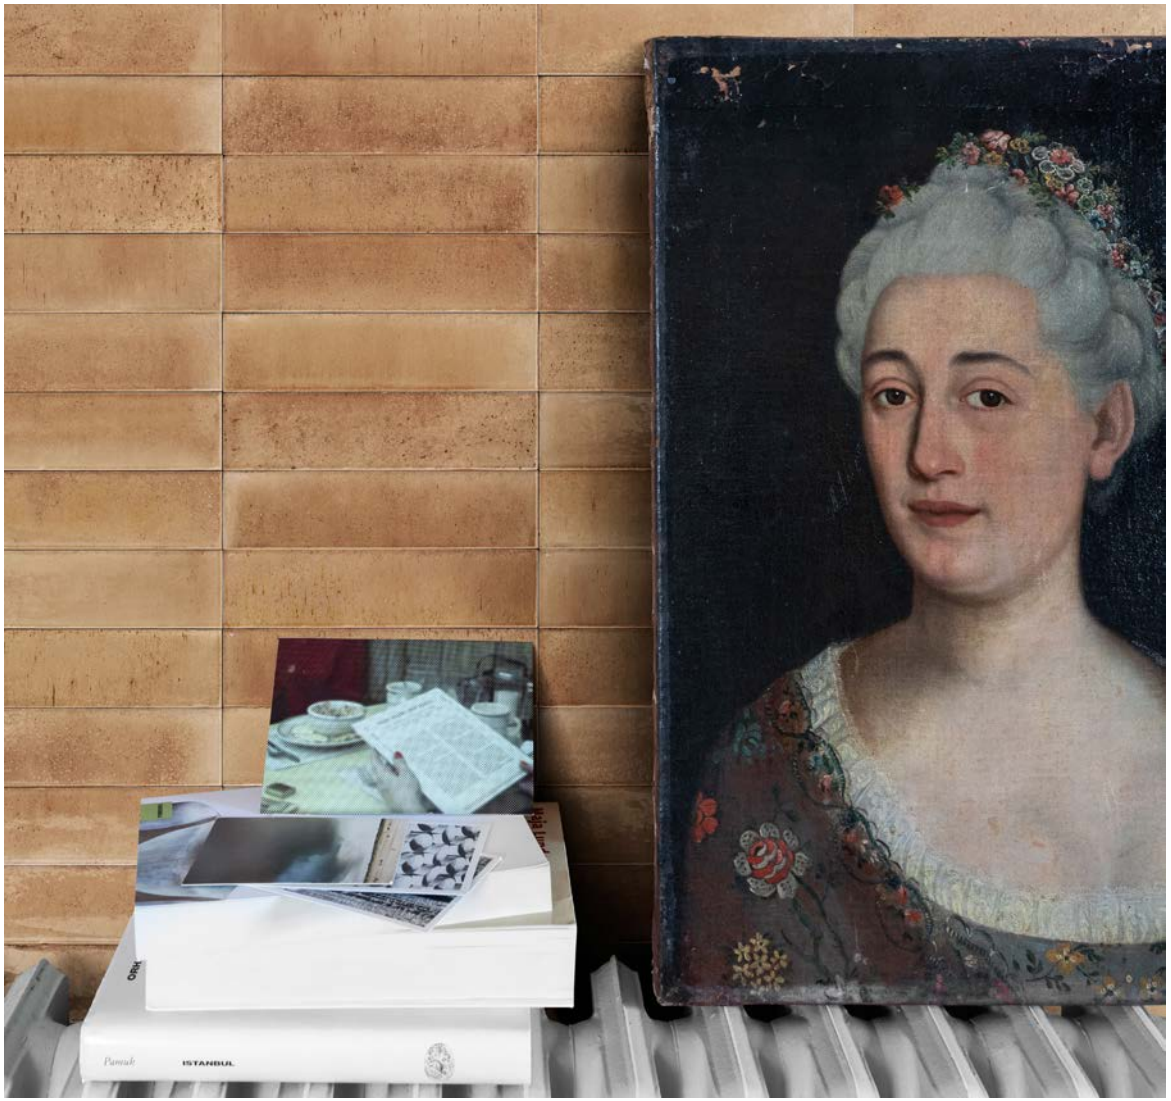


Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# **LUME 2.0** SERIES

## **LIFESTYLE** IMAGES

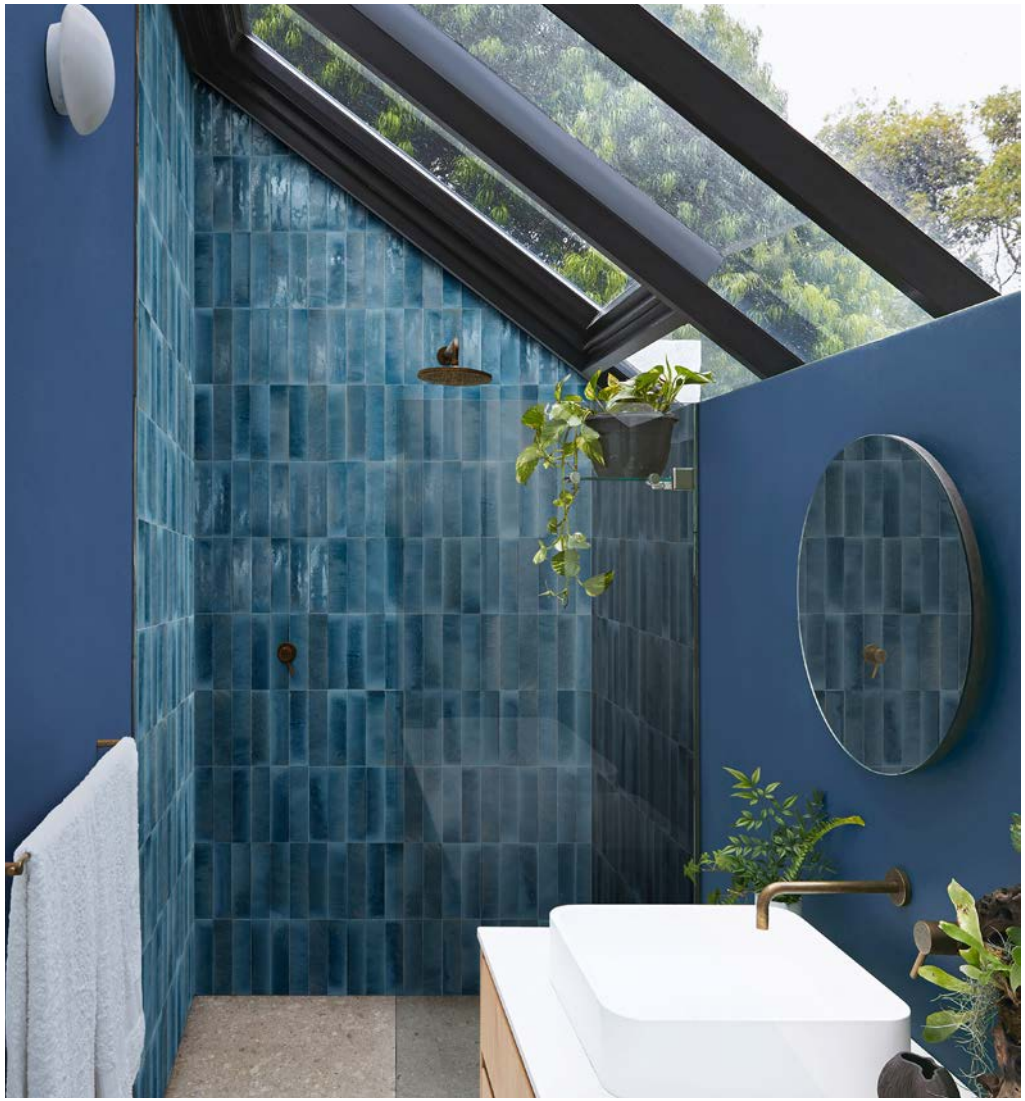

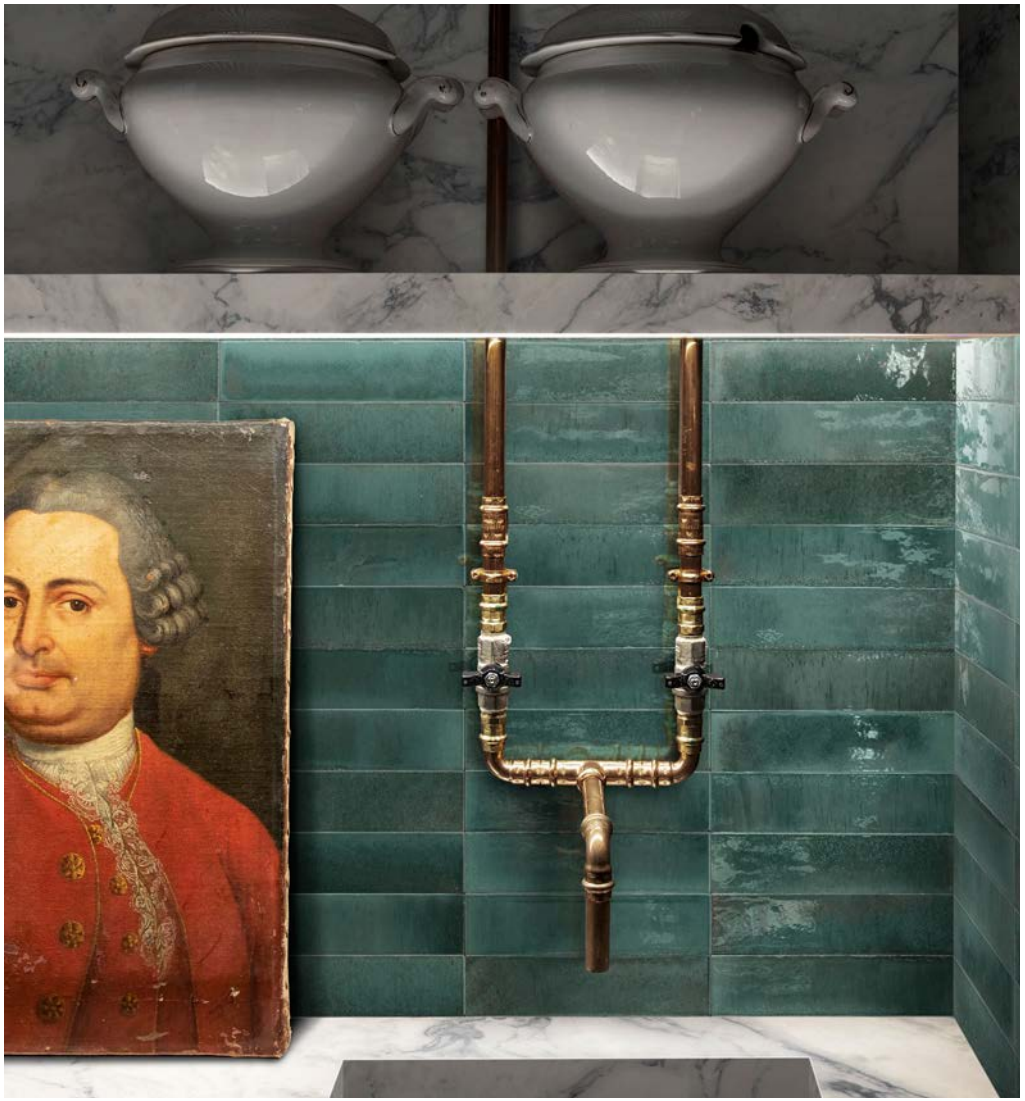

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# **LUME 2.0** SERIES

## **TECHNICAL** DATA

| technical characteristics | test method | required values | result |
|---|---|---|---|
| water absorption | ISO 10545-3 | ≤0.5% | Eb ≤0,5 (Individual maximum value 0,6%) |
| modulus of rupture | ISO 10545-4 | ≥35 | R ≥35 (Individual minimun value 32 N/mm2) |
| surface quality | ISO 10545-2 | Complies with the standards | ≥95% |
| breaking strength | ISO 10545-4 | ≥1300 | ≥1300 (Thickness ≥7,5 mm)<br>≥700 (Thickness < 7,5 mm) |
| crazing resistance | ISO 10545-11 | Pass | Pass |
| chemical resistance | ISO 10545-13 | Declared value | Pass |
| resistance to frost | ISO 10545-12 | Resistant | Pass |
| staining resistance | ISO 10545-14 | Minimum Class 3 | Pass |

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.